

1.2 The dot product of two vectors

The *dot product* of two vectors $\vec{A}$ and $\vec{B}$ is written $\vec{A} \cdot \vec{B}$ (pronounced ‘A dot B’). The dot product of $\vec{A}$ and $\vec{B}$ is the product of the magnitudes of the two vectors times a number that expresses the degree to which $\vec{A}$ and $\vec{B}$ are parallel: $\cos \theta_{AB}$, where θ_{AB} is the angle between $\vec{A}$ and $\vec{B}$. That is,

$$\vec{A} \cdot \vec{B} \stackrel{\text{def}}{=} |\vec{A}| |\vec{B}| \cos \theta_{AB}$$

which is sometimes written more concisely as

$$\vec{A} \cdot \vec{B} = AB \cos \theta.$$

Key special cases. Here are two special cases that come up again and again.

Example: Parallel vectors

If $\vec{A}$ and $\vec{B}$ are parallel, then $\cos \theta_{AB} = 1$, and

$$\vec{A} \cdot \vec{B} = AB.$$

Example: Perpendicular vectors

If $\vec{A}$ and $\vec{B}$ are perpendicular, then $\cos \theta_{AB} = 0$, and

$$\vec{A} \cdot \vec{B} = 0.$$

It is helpful to know, almost without a thought, that ^①

$$\begin{aligned} \cos(0) &= 1, \\ \sin(0) &= 0, \\ \cos(\pi/2) &= 0, \text{ and} \\ \sin(\pi/2) &= 1. \end{aligned}$$

The dot product of two vectors is a scalar. So the dot product is sometimes called the *scalar product*.

What is the dot product good for?

The dot product is used

- To project a vector in a given direction;
- To reduce a vector to components;
- To reduce vector equations to scalar equations;
- To define work and power; and

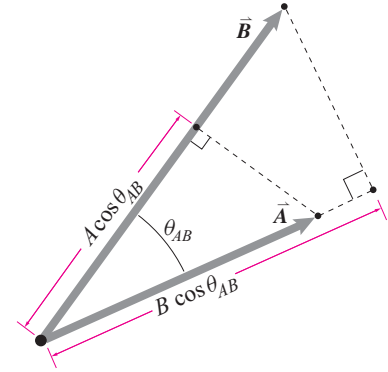


Figure 1.31: The dot product of $\vec{A}$ and $\vec{B}$ is a scalar and so is not easily drawn. It is given by $\vec{A} \cdot \vec{B} = AB \cos \theta_{AB}$ which is A times the projection of $\vec{B}$ in the A direction and also B times the projection of $\vec{A}$ in the B direction.

^①**Advice:** Draw as many triangles and unit circles as it takes to get these 4 special cases into your head so they can be used with only a quick thought.

- To help solve geometry problems.

Most fundamental is the third item ‘To reduce vector equations to scalar equations’. Mechanics equations are most often vector equations. Yet, when you solve problems, in the end, you are always solving scalar equations. Thus, you need, somehow or other, to use dot products for most mechanics problems. In some sense, the dot product is the *only* way to get from vector equations to scalar equations.

Using the geometric definition of dot product, and the rules for vector addition we have already discussed, you should be able to convince yourself of the features of the dot products in box 1.3. The identities in box 1.3 lead to the following equivalent ways of expressing the dot product of $\vec{A}$ and $\vec{B}$.

$$\begin{aligned}
 \vec{A} \cdot \vec{B} &= |\vec{A}| |\vec{B}| \cos \theta_{AB} \\
 &= A_x B_x + A_y B_y + A_z B_z \quad (\text{component form}) \quad (1.3) \\
 &= A_{x'} B_{x'} + A_{y'} B_{y'} + A_{z'} B_{z'} \\
 &= |\vec{A}| \cdot [\text{scalar projection of } \vec{B} \text{ in the } \vec{A} \text{ direction}] \\
 &= |\vec{B}| \cdot [\text{scalar projection of } \vec{A} \text{ in the } \vec{B} \text{ direction}]
 \end{aligned}$$

Mechanics solutions make use of all of these relations. The most famous, of course, is the second, sometimes written as

1.3 Useful basic features of the vector dot product

Here are some features of the dot product that you will use again and again. They all follow naturally from the definition

$$\vec{A} \cdot \vec{B} = AB \cos \theta.$$

Commutative law. Order doesn't matter with dot products.
 $AB \cos \theta = BA \cos \theta$

$$\Rightarrow \vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}.$$

A distributive law. Scalars slide through vector products like mercury through a chicken. $(aA)B \cos \theta = A(aB) \cos \theta$

$$\Rightarrow (a\vec{A}) \cdot \vec{B} = \vec{A} \cdot (a\vec{B}) = a(\vec{A} \cdot \vec{B}).$$

Another distributive law. Vector dot products distribute like regular multiplication. the projection of $\vec{B} + \vec{C}$ onto $\vec{A}$ is the sum of the two separate projections, so

$$\vec{A} \cdot (\vec{B} + \vec{C}) = \vec{A} \cdot \vec{B} + \vec{A} \cdot \vec{C}.$$

Perpendicular vectors have zero for a dot product. If $\vec{A} \perp \vec{B}$ then the angle between them is $\pi/2$. Because $AB \cos \pi/2 = 0$

$$\Rightarrow \vec{A} \cdot \vec{B} = 0 \quad \text{if } \vec{A} \perp \vec{B}.$$

The dot product of parallel vectors is the product of their magnitudes. The angle between parallel vectors is zero and $AB \cos 0 = AB$. In particular, $\vec{A} \cdot \vec{A} = A^2$ or $|\vec{A}| = \sqrt{\vec{A} \cdot \vec{A}}$

$$\Rightarrow \vec{A} \cdot \vec{B} = |\vec{A}| |\vec{B}| \quad \text{if } \vec{A} \parallel \vec{B}.$$

The standard unit base vectors are orthonormal. They are unit vectors (in this case ‘normal’ means normalized, meaning taken down to size) and they are perpendicular (ortho) to each other.

$$\hat{i} \cdot \hat{i} = \hat{j} \cdot \hat{j} = \hat{k} \cdot \hat{k} = 1 \quad \text{and} \quad \hat{i} \cdot \hat{j} = \hat{j} \cdot \hat{k} = \hat{k} \cdot \hat{i} = 0$$

Also, the standard tilted base vectors are orthonormal.

$$\hat{i}' \cdot \hat{i}' = \hat{j}' \cdot \hat{j}' = \hat{k}' \cdot \hat{k}' = 1 \quad \text{and} \quad \hat{i}' \cdot \hat{j}' = \hat{j}' \cdot \hat{k}' = \hat{k}' \cdot \hat{i}' = 0$$

$$\vec{A} \cdot \vec{B} = A_1 B_1 + A_2 B_2 + A_3 B_3.$$

To see how this component formula for the dot product follows from the geometric definition above see box 1.4 on page 7.

Using the dot product to find components

To find the x component of a vector (or vector expression) one can use the dot product (fig. 1.32),

$$v_x = \text{projection of } \vec{v} \text{ in the } \hat{i} \text{ direction} = \vec{v} \cdot \hat{i}. \quad (1.4)$$

This idea can be used for finding components in any direction.

Tilted base vectors. If one knows the orientation of the tilted unit vectors $\hat{i}', \hat{j}', \hat{k}'$ relative to the standard bases $\hat{i}, \hat{j}, \hat{k}$ then you can find the dot products between the standard base vectors and the tilted base vectors.

In 2D, assume that (fig. 1.33) $\hat{i} \cdot \hat{j}' = -\sin \theta$ and $\hat{j} \cdot \hat{j}' = \cos \theta$. One can then use the dot product to find the $x'y'$ components ($A_{x'}, A_{y'}$) from the xy components (A_x, A_y). For example, We start with the absurdly obvious (and ridiculously useful) equation

$$\vec{A} = \vec{A}$$

and dot both sides with $\hat{j}'$ to get:

$$\begin{aligned} \vec{A} \cdot \hat{j}' &= \vec{A} \cdot \hat{j}' \\ \underbrace{(A_{x'} \hat{i}' + A_{y'} \hat{j}') \cdot \hat{j}'}_{\vec{A}} &= \underbrace{(A_x \hat{i} + A_y \hat{j}) \cdot \hat{j}'}_{\vec{A}} \\ A_{x'} \underbrace{\hat{i}' \cdot \hat{j}'}_0 + A_{y'} \underbrace{\hat{j}' \cdot \hat{j}'}_1 &= A_x \hat{i} \cdot \hat{j}' + A_y \hat{j} \cdot \hat{j}' \\ \Rightarrow A_{y'} &= A_x \underbrace{(\hat{i} \cdot \hat{j}')}_{-\sin \theta} + A_y \underbrace{(\hat{j} \cdot \hat{j}')}_{\cos \theta}. \end{aligned}$$

Similarly, one could find the component $A_{x'}$ using a dot product with $\hat{i}'$ as

$$A_{x'} = A_x \underbrace{(\hat{i} \cdot \hat{i}')}_{\cos \theta} + A_y \underbrace{(\hat{j} \cdot \hat{i}')}_{\sin \theta}.$$

Using dot products to find components of vectors is particularly useful when more than one base vector system is used.

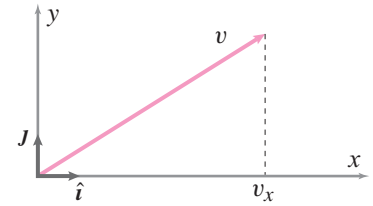


Figure 1.32: The dot product with unit vectors gives projection. For example, $v_x = \vec{v} \cdot \hat{i}$.

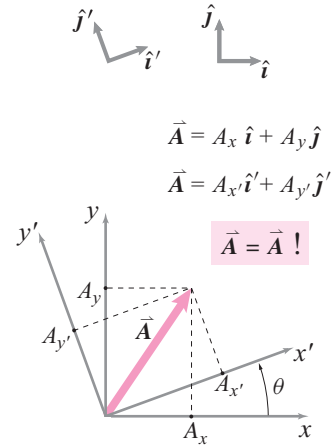


Figure 1.33: The dot product helps find components in terms of tilted unit vectors. Note, the components of $\vec{A}$ depend on which coordinate system you use. Nonetheless, $\vec{A} = \vec{A}$, no matter how $\vec{A}$ is represented.

Matrix form. For those comfortable with linear algebra, note that the results above can be condensed into the matrix equations

$$[\vec{A}]_{x'y'} = [R][\vec{A}]_{xy}, \text{ or} \quad (1.5)$$

$$\begin{bmatrix} A_{x'} \\ A_{y'} \end{bmatrix} = \underbrace{\begin{bmatrix} \cos(\theta) & \sin(\theta) \\ -\sin(\theta) & \cos(\theta) \end{bmatrix}}_R \begin{bmatrix} A_x \\ A_y \end{bmatrix}. \quad (1.6)$$

Using dot products to get scalar equations

Again note that,

Dot products are *the* way to get scalar equations from vector equations.

Example: Force balance

The statics vector force-balance equation

$$\vec{F}_1 + \vec{F}_2 + \vec{F}_3 = \vec{0} \quad (1.7)$$

can be reduced to two scalar equations by taking the dot product of both sides with $\hat{i}$ and $\hat{j}$

$$\{(1.7)\} \cdot \hat{i} \Rightarrow F_{1x} + F_{2x} + F_{3x} = 0 \quad (1.8)$$

$$\{(1.7)\} \cdot \hat{j} \Rightarrow F_{1y} + F_{2y} + F_{3y} = 0. \quad (1.9)$$

This approach is more general than the common (informal) approach of ‘taking x and y components’.

Dotting with vectors other than $\hat{i}$, $\hat{j}$, or $\hat{k}$ We will often use unit vectors other than $\hat{i}$, $\hat{j}$, and $\hat{k}$. We can use dot products with these ‘crooked’ vectors to get scalar equations.

Example: Getting scalar equations without dotting with $\hat{i}$, $\hat{j}$, or $\hat{k}$.

Given the vector equation

$$-mg\hat{j} + N\hat{n} = ma\hat{\lambda}$$

where it is known that the unit vector $\hat{n}$ is perpendicular to the unit vector $\hat{\lambda}$, we can get a scalar equation and eliminate an unknown at the same time by dotting both sides with $\hat{\lambda}$,

$$\begin{aligned} \{ (-mg\hat{j} + N\hat{n}) \} \cdot \hat{\lambda} &= (ma\hat{\lambda}) \cdot \hat{\lambda} \\ (-mg\hat{j} + N\hat{n}) \cdot \hat{\lambda} &= (ma\hat{\lambda}) \cdot \hat{\lambda} \\ -mg\hat{j} \cdot \hat{\lambda} + N \underbrace{\hat{n} \cdot \hat{\lambda}}_0 &= ma \underbrace{\hat{\lambda} \cdot \hat{\lambda}}_1 \\ -mg\hat{j} \cdot \hat{\lambda} &= ma \Rightarrow a = -g \cos \theta \end{aligned}$$

with $\hat{j} \cdot \hat{\lambda}$ being $\cos \theta$, with θ being the angle between $\hat{j}$ and $\hat{\lambda}$.

Using dot products to solve geometry problems

A big part of solving many mechanics problems is the solving of geometry problems. Vector math, including the dot product, is useful for solving geometry problems.

Perpendicular and parallel parts. Given any vector $\vec{A}$ and a unit vector $\hat{\lambda}$, vector $\vec{A}$ can be written as the sum of two parts,

$$\vec{A} = \vec{A}^{\parallel} + \vec{A}^{\perp}$$

where $\vec{A}^{\parallel}$ ('A parallel') is parallel to $\hat{\lambda}$ and $\vec{A}^{\perp}$ ('A perp') is perpendicular to $\hat{\lambda}$ (see fig. 1.34). The part parallel to $\hat{\lambda}$ is

$$\vec{A}^{\parallel} = (\text{projection of } \vec{A} \text{ in } \hat{\lambda} \text{ direction})\hat{\lambda} = (\vec{A} \cdot \hat{\lambda})\hat{\lambda}.$$

The perpendicular part of $\vec{A}$ is just what you get when you subtract out the parallel part, namely,

$$\vec{A}^{\perp} = \vec{A} - \vec{A}^{\parallel} = \vec{A} - (\vec{A} \cdot \hat{\lambda})\hat{\lambda}$$

The claimed properties of the decomposition can now be checked, namely that $\vec{A} = \vec{A}^{\parallel} + \vec{A}^{\perp}$ (just add the 2 equations above and see), that $\vec{A}^{\parallel}$ is in the direction of $\hat{\lambda}$ (it's a scalar multiple), and that $\vec{A}^{\perp}$ is perpendicular to $\hat{\lambda}$ ($\vec{A}^{\perp} \cdot \hat{\lambda} = 0$).

Example: Closest point on a given line, to a given point off of the line

What point D on line AB is closest to point C?


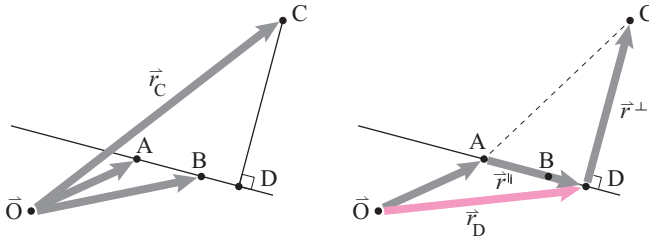


Figure 1.34: For any $\vec{A}$ and $\hat{\lambda}$, $\vec{A}$ can be decomposed into a part parallel to $\hat{\lambda}$ and a part perpendicular to $\hat{\lambda}$.

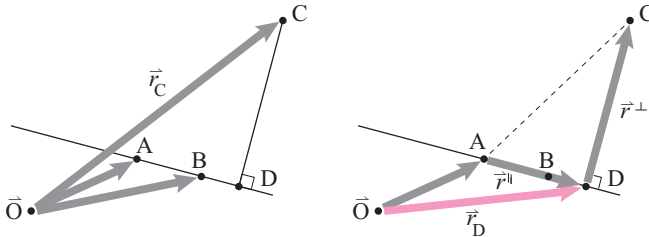

In other words, a line is defined by the two given points A and B. A given point C is off of the line. What point D, on the line, is closest to C. Or, in vector language, Given vectors $\vec{r}_A$ and $\vec{r}_B$ defining a line, and $\vec{r}_C$, defining a point off of the line, find $\vec{r}_D$, the position of the point on the line that is closest to C. What is point $\vec{r}_D$, the point on the line AB that is closest to C? The answer is,

$$\vec{r}_D = \vec{r}_A + \vec{r}_{C/A}^{\parallel}$$

where $\vec{r}_{C/A}^{\parallel}$ is the part of $\vec{r}_{C/A}$ that is parallel to the line segment AB. Thus,

$$\vec{r}_D = \vec{r}_A + \left[(\vec{r}_C - \vec{r}_A) \cdot \frac{\vec{r}_B - \vec{r}_A}{|\vec{r}_B - \vec{r}_A|} \right] \frac{\vec{r}_B - \vec{r}_A}{|\vec{r}_B - \vec{r}_A|}.$$

Example: Gram-Schmidt orthogonalization

A plane is defined in 3D by two vectors $\vec{A}$ and $\vec{B}$ that lie in a plane. The goal of 'Gram-Schmidt orthogonalization' is to find a pair of orthonormal vectors^② that lie in the plane. First find a unit vector $\hat{\lambda}_A$ in the $\vec{A}$ direction:

$$\hat{\lambda}_A = \vec{A}/|\vec{A}|.$$

^②A set of *orthonormal* vectors are a set of unit vectors that are all perpendicular to each other. The 'ortho' is for orthogonal, meaning perpendicular. And, for no good reason, vectors are called *normalized* if you replace them with unit vectors in their directions.

Then find the part $\vec{B}^\perp$ of $\vec{B}$ that is orthogonal to $\hat{\lambda}_A$:

$$\vec{B}^\perp = \vec{B} - \vec{B}^\parallel = \vec{B} - (\vec{B} \cdot \hat{\lambda}_A) \hat{\lambda}_A.$$

Finally, normalize:

$$\hat{\lambda}_B = \vec{B}^\perp / |\vec{B}^\perp|$$

From two vectors in a plane, $\vec{A}$ and $\vec{B}$, we have found a pair of vectors $(\hat{\lambda}_A, \hat{\lambda}_B)$ that are orthonormal (unit vectors that are orthogonal to each other) and in the same plane.

Components of a vector perpendicular and parallel to a given plane. The ideas above also apply to planes. What parts of a vector $\vec{C}$ are in $(\vec{C}^\parallel)$ and orthogonal $(\vec{C}^\perp)$ to a given plane?

Method 1. The plane is defined by two vectors $\vec{A}$ and $\vec{B}$ (two vectors that are in the plane). But $\vec{A}$ and $\vec{B}$ are not necessarily orthogonal. So, we first use Gram-Schmidt orthogonalization (sample above) to find orthonormal vectors $\hat{\lambda}_A$ and $\hat{\lambda}_B$ (see the example above). Then, we have that

$$\vec{C}^\parallel = (\vec{C} \cdot \hat{\lambda}_A) \hat{\lambda}_A + (\vec{C} \cdot \hat{\lambda}_B) \hat{\lambda}_B \quad \text{and} \quad \vec{C}^\perp = \vec{C} - \vec{C}^\parallel$$

Method 2. If the plane has known normal $\hat{n}$ then

$$\vec{C}^\perp = (\vec{C} \cdot \hat{n}) \hat{n} \quad \text{and} \quad \vec{C}^\parallel = \vec{C} - \vec{C}^\perp.$$

Vector algebra

Vectors are algebraic quantities. So you use algebra to manipulate them in equations. The rules for vector algebra are similar to the rules for ordinary (scalar) algebra. For example, if vector $\vec{A}$ is the same as vector $\vec{B}$, $\vec{A} = \vec{B}$, then, for any scalar a and any vector $\vec{C}$, we have,

$$\begin{aligned} \vec{A} + \vec{C} &= \vec{B} + \vec{C}, \\ a\vec{A} &= a\vec{B}, \text{ and} \\ \vec{A} \cdot \vec{C} &= \vec{B} \cdot \vec{C}. \end{aligned}$$

Why? Because performing the same operation on equal quantities gives equal results. The vectors $\vec{A}$, $\vec{B}$, and $\vec{C}$ might themselves be expressions involving other vectors.

The equations above show all^③ of the allowable manipulations of vector equations:

- Adding a common term to both sides,
- Multiplying both sides by a common scalar, and
- Taking the dot product of both sides with a common vector.

All the distributive, associative, and commutative laws of ordinary addition and multiplication hold *except* for when there is no sensible meaning to the expressions^④.

More about vector algebra and the use of vector algebra to ‘solve triangles’ is discussed in sec. 1.5 starting on page 106.

③ All for now, that is. Later we will add ‘taking the cross product of both sides with a common vector’.

④ **Beware.** It does not make sense to add a vector and a scalar; $7 + \vec{A}$ is a *nonsense* expression. And you cannot divide a vector by a vector or a scalar by a vector; $7/\vec{t}$ and $\vec{A}/\vec{C}$ are *nonsense* expressions.

Dot products on the computer

Using computers for vector addition was discussed on page 56. Most computer languages will agree to calculating a dot product for you in response to commands something like this:

$$\begin{aligned} \mathbf{A} &= [1 \quad 2 \quad 5] \\ \mathbf{B} &= [-2 \quad 4 \quad 19] \\ \mathbf{D} &= \mathbf{A}(1)*\mathbf{B}(1) + \mathbf{A}(2)*\mathbf{B}(2) + \mathbf{A}(3)*\mathbf{B}(3). \end{aligned}$$

In pseudo code we could write $\mathbf{D} = \mathbf{A} \cdot \mathbf{B}$. Many computer languages have a shorter way to write the dot product like $\text{dot}(\mathbf{A}, \mathbf{B})$. In a language built for linear algebra $\mathbf{D} = \mathbf{A}*\mathbf{B}'$ ^⑤ will work because the rules of matrix multiplication are then the same as the component formula for the dot product.

⑤ Recall that $\mathbf{B}'$ means the transpose of $\mathbf{B}$, in this case turning the row of numbers $\mathbf{B}$ into a column of numbers.

1.4 Using the geometric definition of the dot product to find the components formula

This theoretical aside answers the question: 'Why does

$$AB \cos(\theta) = A_x B_x + A_y B_y + A_z B_z?$$

Vectors are essentially a geometric concept and we have consequently defined the dot product geometrically as $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = AB \cos \theta$. Almost 400 years ago René Descartes discovered that you could do geometry by doing algebra on the coordinates of points.

So we should be able to figure out the dot product of two vectors by knowing their components. The central key to finding this component formula is the distributive law

$$\vec{\mathbf{A}} \cdot (\vec{\mathbf{B}} + \vec{\mathbf{C}}) = \vec{\mathbf{A}} \cdot \vec{\mathbf{B}} + \vec{\mathbf{A}} \cdot \vec{\mathbf{C}}$$

which we derived geometrically. If we write $\vec{\mathbf{A}} = A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}} + A_z \hat{\mathbf{k}}$ and $\vec{\mathbf{B}} = B_x \hat{\mathbf{i}} + B_y \hat{\mathbf{j}} + B_z \hat{\mathbf{k}}$ then we just repeatedly use the distributive law to derive the component formulae, as follows.

$$\begin{aligned} \vec{\mathbf{A}} \cdot \vec{\mathbf{B}} &= (A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}} + A_z \hat{\mathbf{k}}) \cdot (B_x \hat{\mathbf{i}} + B_y \hat{\mathbf{j}} + B_z \hat{\mathbf{k}}) \\ &= (A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}} + A_z \hat{\mathbf{k}}) \cdot B_x \hat{\mathbf{i}} + \\ &\quad (A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}} + A_z \hat{\mathbf{k}}) \cdot B_y \hat{\mathbf{j}} + \\ &\quad (A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}} + A_z \hat{\mathbf{k}}) \cdot B_z \hat{\mathbf{k}} \\ &= A_x B_x \hat{\mathbf{i}} \cdot \hat{\mathbf{i}} + A_y B_x \hat{\mathbf{j}} \cdot \hat{\mathbf{i}} + A_z B_x \hat{\mathbf{k}} \cdot \hat{\mathbf{i}} + \\ &\quad A_x B_y \hat{\mathbf{i}} \cdot \hat{\mathbf{j}} + A_y B_y \hat{\mathbf{j}} \cdot \hat{\mathbf{j}} + A_z B_y \hat{\mathbf{k}} \cdot \hat{\mathbf{j}} + \\ &\quad A_x B_z \hat{\mathbf{i}} \cdot \hat{\mathbf{k}} + A_y B_z \hat{\mathbf{j}} \cdot \hat{\mathbf{k}} + A_z B_z \hat{\mathbf{k}} \cdot \hat{\mathbf{k}} \\ &= A_x B_x (1) + A_y B_x (0) + A_z B_x (0) + \\ &\quad A_x B_y (0) + A_y B_y (1) + A_z B_y (0) + \\ &\quad A_x B_z (0) + A_y B_z (0) + A_z B_z (1) \end{aligned}$$

$$\Rightarrow \vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = A_x B_x + A_y B_y + A_z B_z \quad (3D).$$

$$\Rightarrow \vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = A_x B_x + A_y B_y \quad (2D).$$

If we call our coordinate x_1, x_2 , and x_3 ; and our unit base vectors $\hat{\mathbf{e}}_1, \hat{\mathbf{e}}_2$, and $\hat{\mathbf{e}}_3$ we would have $\vec{\mathbf{A}} = A_1 \hat{\mathbf{e}}_1 + A_2 \hat{\mathbf{e}}_2 + A_3 \hat{\mathbf{e}}_3$ and $\vec{\mathbf{B}} = B_1 \hat{\mathbf{e}}_1 + B_2 \hat{\mathbf{e}}_2 + B_3 \hat{\mathbf{e}}_3$ and the dot product has the familiar tidy form:

$$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = A_1 B_1 + A_2 B_2 + A_3 B_3 = \sum_{i=1}^3 A_i B_i.$$

Tilted coordinates: xyz vs $x'y'z'$.

The demonstration above could have been carried out using a different orthogonal coordinate system $x'y'z'$ that was tilted with respect to the xyz system. By identical reasoning we would find that $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = A_{x'} B_{x'} + A_{y'} B_{y'} + A_{z'} B_{z'}$. Even though all of the numbers in the list $[A_x, A_y, A_z]$ might be different from the numbers in the list $[A_{x'}, A_{y'}, A_{z'}]$ and similarly all the list $[B_x, B_y, B_z]$ might be different than the list $[B_{x'}, B_{y'}, B_{z'}]$, so (remarkably, luckily and necessarily),

$$A_x B_x + A_y B_y + A_z B_z = A_{x'} B_{x'} + A_{y'} B_{y'} + A_{z'} B_{z'}.$$

The formula for the dot product is the same in the different coordinate systems. And the value of the dot product is the same in the different coordinate systems. Yet all the numbers on the two sides of the formula above are likely different from each other.

SAMPLE 1.12 Calculating dot products: Find the dot product of the two vectors $\vec{a} = 2\hat{i} + 3\hat{j} - 2\hat{k}$ and $\vec{r} = 5\hat{m}\hat{i} - 2\hat{m}\hat{j}$.

Solution The dot product of the two vectors is

$$\begin{aligned}\vec{a} \cdot \vec{r} &= (2\hat{i} + 3\hat{j} - 2\hat{k}) \cdot (5\hat{m}\hat{i} - 2\hat{m}\hat{j}) \\ &= (2 \cdot 5\text{ m}) \underbrace{\hat{i} \cdot \hat{i}}_1 - (2 \cdot 2\text{ m}) \underbrace{\hat{i} \cdot \hat{j}}_0 \\ &\quad + (3 \cdot 5\text{ m}) \underbrace{\hat{j} \cdot \hat{i}}_0 - (3 \cdot 2\text{ m}) \underbrace{\hat{j} \cdot \hat{j}}_1 \\ &\quad - (2 \cdot 5\text{ m}) \underbrace{\hat{k} \cdot \hat{i}}_0 + (2 \cdot 2\text{ m}) \underbrace{\hat{k} \cdot \hat{j}}_0 \\ &= 10\text{ m} - 6\text{ m} = 4\text{ m}.\end{aligned}$$

$$\vec{a} \cdot \vec{r} = 4\text{ m}$$

Comments: Note that with just a little bit of foresight, we could totally ignore the $\hat{k}$ component of $\vec{a}$ since $\vec{r}$ has no $\hat{k}$ component, i.e., $\hat{k} \cdot \vec{r} = 0$. Also, if we keep in mind that $\hat{i} \cdot \hat{j} = \hat{j} \cdot \hat{i} = 0$, we could compute the above dot product in one line:

$$\vec{a} \cdot \vec{r} = (2\hat{i} + 3\hat{j}) \cdot (5\hat{m}\hat{i} - 2\hat{m}\hat{j}) = (2 \cdot 5\text{ m}) \underbrace{\hat{i} \cdot \hat{i}}_1 - (3 \cdot 2\text{ m}) \underbrace{\hat{j} \cdot \hat{j}}_1 = 4\text{ m}.$$

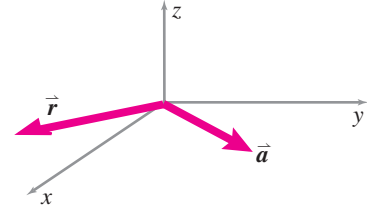


Figure 1.35

SAMPLE 1.13 Component of a vector in a given direction: A force acting at some point is given as $\vec{F} = 5\text{ N}\hat{i} + 3\text{ N}\hat{j} + 2\text{ N}\hat{k}$.

1. Find the y-component of $\vec{F}$.
2. Find the component of $\vec{F}$ along the vector $\vec{r} = 3\hat{m}\hat{i} - 4\hat{m}\hat{j}$.

Solution

1. *Component along the y-direction:* The y-component of $\vec{F}$ is the scalar quantity multiplying the unit vector $\hat{j}$, that is, 3 N. Although the y-component of $\vec{F}$ is obvious here (and hence the problem is trivial), we can find it in a formal way using the dot product between $\vec{F}$ and $\hat{j}$.

$$\begin{aligned}F_y &= \vec{F} \cdot (\text{a unit vector along y-axis}) \\ &= (5\text{ N}\hat{i} + 3\text{ N}\hat{j} + 2\text{ N}\hat{k}) \cdot \hat{j} \\ &= 5\text{ N} \underbrace{\hat{i} \cdot \hat{j}}_0 + 3\text{ N} \underbrace{\hat{j} \cdot \hat{j}}_1 + 2\text{ N} \underbrace{\hat{k} \cdot \hat{j}}_0 = 3\text{ N}.\end{aligned}$$

$$F_y = \vec{F} \cdot \hat{j} = 3\text{ N}.$$

2. *Component along the $\vec{r}$ -direction:* The component of $\vec{F}$ along $\vec{r}$ is obtained from the dot product of $\vec{F}$ with a unit vector along $\vec{r}$. Therefore, we first need to find a unit vector $\hat{\lambda}_r$ along $\vec{r}$ and then dot it with $\vec{F}$.

$$\begin{aligned}\hat{\lambda}_r &= \frac{\vec{r}}{|\vec{r}|} = \frac{3\hat{m}\hat{i} - 4\hat{m}\hat{j}}{\sqrt{3^2 + 4^2}\text{ m}} = 0.6\hat{i} - 0.8\hat{j} \\ F_r &= \vec{F} \cdot \hat{\lambda}_r \\ &= (5\text{ N}\hat{i} + 3\text{ N}\hat{j} + 2\text{ N}\hat{k}) \cdot (0.6\hat{i} - 0.8\hat{j}) \\ &= 3.0\text{ N} - 2.4\text{ N} = 0.6\text{ N}.\end{aligned}$$

$$F_r = \vec{F} \cdot \hat{\lambda}_r = 0.6\text{ N}$$




Figure 1.36




Figure 1.37

SAMPLE 1.14 Finding angle between two vectors using dot product: Find the angle between the vectors $\vec{r}_1 = 2\hat{i} + 3\hat{j}$ and $\vec{r}_2 = 2\hat{i} - \hat{j}$.

Solution From the definition of dot product between two vectors

$$\begin{aligned}\vec{r}_1 \cdot \vec{r}_2 &= |\vec{r}_1| |\vec{r}_2| \cos \theta \\ \text{or} \quad \cos \theta &= \frac{\vec{r}_1 \cdot \vec{r}_2}{|\vec{r}_1| |\vec{r}_2|} \\ &= \frac{(2\hat{i} + 3\hat{j}) \cdot (2\hat{i} - \hat{j})}{(\sqrt{2^2 + 3^2})(\sqrt{2^2 + 1^2})} \\ &= \frac{4 - 3}{\sqrt{13}\sqrt{5}} = 0.124\end{aligned}$$

$$\text{Therefore, } \theta = \cos^{-1}(0.124) = 82.87^\circ.$$

$$\theta = 83^\circ$$




Figure 1.38

SAMPLE 1.15 Finding direction cosines from unit vectors: Find the angles between $\vec{F} = 4\text{ N}\hat{i} + 6\text{ N}\hat{j} + 7\text{ N}\hat{k}$ and each of the three axes.

Solution

$$\begin{aligned}\vec{F} &= F\hat{\lambda} \\ \hat{\lambda} &= \frac{\vec{F}}{F} \\ &= \frac{4\text{ N}\hat{i} + 6\text{ N}\hat{j} + 7\text{ N}\hat{k}}{\sqrt{4^2 + 6^2 + 7^2}\text{ N}} \\ &= 0.4\hat{i} + 0.6\hat{j} + 0.7\hat{k}.\end{aligned}$$

Let the angles between $\hat{\lambda}$ and the x , y , and z axes be θ , ϕ and ψ respectively. Then

$$\begin{aligned}\cos \theta &= \frac{\hat{i} \cdot \hat{\lambda}}{|\hat{i}| |\hat{\lambda}|} = \frac{0.4}{|1| |1|} = 0.4. \\ \Rightarrow \theta &= \cos^{-1}(0.4) = 66.4^\circ.\end{aligned}$$

Similarly,

$$\begin{aligned}\cos \phi &= 0.6 \quad \text{or} \quad \phi = 53.1^\circ \\ \cos \psi &= 0.7 \quad \text{or} \quad \psi = 45.6^\circ.\end{aligned}$$

$$\theta = 66.4^\circ, \phi = 53.1^\circ, \psi = 45.6^\circ$$

Comments: The components of a unit vector give the direction cosines with the respective axes. That is, if the angle between the unit vector and the x , y , and z axes are θ , ϕ and ψ , respectively (as above), then

$$\hat{\lambda} = \underbrace{\cos \theta}_{\lambda_x} \hat{i} + \underbrace{\cos \phi}_{\lambda_y} \hat{j} + \underbrace{\cos \psi}_{\lambda_z} \hat{k}.$$

SAMPLE 1.16 Separating a vector equation into scalar equations:

Assume that after writing the equilibrium equation as $\sum \vec{F} = mg\hat{j}$ in a particular problem, a student finds that $\sum \vec{F} = (20\text{ N} - P_1)\hat{i} + 7\text{ N}\hat{j} - P_2\hat{k}$. Separate the scalar equations in the $\hat{i}$, $\hat{j}$, and $\hat{k}$ directions.

Solution From a vector equation, separating the scalar equations is trivial as long as both sides of a vector equation are in the same basis, e.g., $\hat{i}$, $\hat{j}$, and $\hat{k}$. We just equate the individual components on both sides. That is, if

$$\begin{aligned} \overbrace{(20\text{ N} - P_1)\hat{i} + 7\text{ N}\hat{j} - P_2\hat{k}}^{\sum \vec{F}} &= mg\hat{j} \\ \text{then, } 20\text{ N} - P_1 &= 0 && (\hat{i} \text{ component}) \\ 7\text{ N} &= mg && (\hat{j} \text{ component}) \\ -P_2 &= 0. && (\hat{k} \text{ component}) \end{aligned}$$

These are the three independent scalar equations in the $\hat{i}$, $\hat{j}$ and $\hat{k}$ directions.

$$20\text{ N} - P_1 = 0, \quad 7\text{ N} = mg, P_2 = 0$$

Comments: The results obtained by equating individual components on both sides of the vector equation are based on the general technique of taking the dot product of both sides of an equation with a vector. It gives a scalar equation valid in any direction that one desires. For the example at hand, the long but easily readable and illustrative calculation is as follows. Taking the dot product of both sides of $\sum \vec{F} = mg\hat{j}$ equation with $\hat{i}$, we write

$$\begin{aligned} \hat{i} \cdot [(20\text{ N} - P_1)\hat{i} + 7\text{ N}\hat{j} - P_2\hat{k}] &= \hat{i} \cdot [mg\hat{j}] \\ \Rightarrow (20\text{ N} - P_1) \underbrace{\hat{i} \cdot \hat{i}}_1 + 7\text{ N} \underbrace{\hat{j} \cdot \hat{i}}_0 - P_2 \underbrace{\hat{k} \cdot \hat{i}}_0 &= mg \underbrace{\hat{j} \cdot \hat{i}}_0 \\ \Rightarrow 20\text{ N} - P_1 &= 0. \end{aligned}$$

Similarly,

$$\begin{aligned} \hat{j} \cdot [\sum \vec{F}] &= \hat{j} \cdot [mg\hat{j}] && \Rightarrow 7\text{ N} = mg \\ \hat{k} \cdot [\sum \vec{F}] &= \hat{k} \cdot [mg\hat{j}] && \Rightarrow -P_2 = 0. \end{aligned}$$

1.2 The dot product of two vectors

1.2.1 Find the dot product of $\vec{a} = 2\hat{i} + 3\hat{j} - \hat{k}$ and $\vec{b} = 2\hat{i} + \hat{j} + 2\hat{k}$.

1.2.2 Find the dot product of $\vec{F} = 0.5\text{ N}\hat{i} + 1.2\text{ N}\hat{j} + 1.5\text{ N}\hat{k}$ and $\hat{\lambda} = -0.8\hat{i} + 0.6\hat{j}$.


1.2.3 Find the dot product $\vec{F} \cdot \vec{r}$ where $\vec{F} = (5\hat{i} + 4\hat{j})\text{ N}$ and $\vec{r} = (-0.8\hat{i} + \hat{j})\text{ m}$. Draw the two vectors and justify your answer for the dot product.

1.2.4 Two vectors, $\vec{a} = -4\sqrt{3}\hat{i} + 12\hat{j}$ and $\vec{b} = \hat{i} - \sqrt{3}\hat{j}$ are given. Find the dot product of the two vectors. How is $\vec{a} \cdot \vec{b}$ related to $|\vec{a}||\vec{b}|$ in this case?

1.2.5 Find the dot product of two vectors $\vec{F} = 10\text{ lbf}\hat{i} - 20\text{ lbf}\hat{j}$ and $\hat{\lambda} = 0.8\hat{i} + 0.6\hat{j}$. Sketch $\vec{F}$ and $\hat{\lambda}$ and show what their dot product represents.

1.2.6 The position vector of a point A is $\vec{r}_A = 30\text{ cm}\hat{i}$. Find the dot product of $\vec{r}_A$ with $\hat{\lambda} = \frac{\sqrt{3}}{2}\hat{i} + \frac{1}{2}\hat{j}$.

1.2.7 From the figure below, find the component of force $\vec{F}$ in the direction of $\hat{\lambda}$.



Problem 1.2.7

1.2.8 Find the angle between $\vec{F}_1 = 2\text{ N}\hat{i} + 5\text{ N}\hat{j}$ and $\vec{F}_2 = -2\text{ N}\hat{i} + 6\text{ N}\hat{j}$.

1.2.9 Given $\vec{\omega} = 2\text{ rad/s}\hat{i} + 3\text{ rad/s}\hat{j}$, $\vec{H}_1 = (20\hat{i} + 30\hat{j})\text{ kg m}^2/\text{s}$ and $\vec{H}_2 = (10\hat{i} + 15\hat{j} + 6\hat{k})\text{ kg m}^2/\text{s}$, find (a) the angle between $\vec{\omega}$ and $\vec{H}_1$ and (b) the angle between $\vec{\omega}$ and $\vec{H}_2$.

1.2.10 The unit normal to a surface is given as $\hat{n} = 0.74\hat{i} + 0.67\hat{j}$. If the weight of a block on this surface acts in the $-\hat{j}$ direction, find the angle that a 1000 N normal force makes with the direction of weight of the block.

1.2.11 Vector algebra. For each equation below state whether:

1. The equation is nonsense. If so, why?
2. Is always true. Why? Give an example.
3. Is never true. Why? Give an example.
4. Is sometimes true. Give examples both ways.


You may use trivial examples.

- a) $\vec{A} + \vec{B} = \vec{B} + \vec{A}$
- b) $\vec{A} + b = b + \vec{A}$
- c) $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$
- d) $\vec{B}/\vec{C} = B/C$
- e) $b/\vec{A} = b/A$
- f) $\vec{A} = (\vec{A} \cdot \vec{B})\vec{B} + (\vec{A} \cdot \vec{C})\vec{C} + (\vec{A} \cdot \vec{D})\vec{D}$

1.2.12 Use the dot product to show ‘the law of cosines’; i. e.,

$$c^2 = a^2 + b^2 + 2ab \cos \theta.$$

(Hint: $\vec{c} = \vec{a} + \vec{b}$; also, $\vec{c} \cdot \vec{c} = \vec{c} \cdot \vec{c}$)




Problem 1.2.12

1.2.13 Find the direction cosines of $\vec{F} = 3\text{ N}\hat{i} - 4\text{ N}\hat{j} + 5\text{ N}\hat{k}$.

1.2.14 A force acting on a bead of mass m is given as $\vec{F} = -20\text{ lbf}\hat{i} + 22\text{ lbf}\hat{j} + 12\text{ lbf}\hat{k}$. What is the angle between the force and the z -axis?


1.2.15 (a) Draw the vector $\vec{r} = 3.5\hat{i} + 3.5\hat{j} - 4.95\hat{k}$. (b) Find the angle this vector makes with the z -axis. (c) Find the angle this vector makes with the x - y plane.

1.2.16 In the figure shown, $\hat{\lambda}$ and $\hat{n}$ are unit vectors parallel and perpendicular to the surface AB, respectively. A force $\vec{W} = -50\text{ N}\hat{j}$ acts on the block. Find the components of $\vec{W}$ along $\hat{\lambda}$ and $\hat{n}$.



Problem 1.2.16


1.2.17 Express the unit vectors $\hat{n}$ and $\hat{\lambda}$ in terms of $\hat{i}$ and $\hat{j}$ shown in the figure. What are the x and y components of $\vec{r} = 3.0\text{ ft}\hat{n} - 1.5\text{ ft}\hat{\lambda}$?



Problem 1.2.17

1.2.18 Find the projection of vector $\vec{r}_{AB}$ (you have to first find this position vector)

1. on the y -axis, and
2. in the $\hat{\lambda}$ direction.




Problem 1.2.18

1.2.19 The net force acting on a particle is $\vec{F} = 2\text{ N}\hat{i} + 10\text{ N}\hat{j}$. Find the components of this force in another coordinate

system with basis vectors $\mathbf{i}' = -\cos\theta\mathbf{i} + \sin\theta\mathbf{j}$ and $\mathbf{j}' = -\sin\theta\mathbf{i} - \cos\theta\mathbf{j}$. For $\theta = 30^\circ$, sketch the vector $\vec{F}$ and show its components in the two coordinate systems.


1.2.20 Find the unit vectors $\hat{\mathbf{e}}_R$ and $\hat{\mathbf{e}}_\theta$ in terms of $\mathbf{i}$ and $\mathbf{j}$ with the geometry shown in the figure. What are the components of $\vec{W}$ along $\hat{\mathbf{e}}_R$ and $\hat{\mathbf{e}}_\theta$?



Problem 1.2.20

1.2.21 Write the position vector of point P in terms of $\hat{\lambda}_1$ and $\hat{\lambda}_2$ and

1. find the y-component of $\vec{r}_P$,
2. find the component of $\vec{r}_P$ along $\hat{\lambda}_1$.

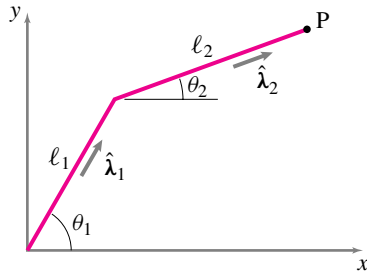

Problem 1.2.21

1.2.22

Let $\vec{F}_1 = 30\text{ N}\mathbf{i} + 40\text{ N}\mathbf{j} - 10\text{ N}\mathbf{k}$, $\vec{F}_2 = -20\text{ N}\mathbf{j} + 2\text{ N}\mathbf{k}$, and $\vec{F}_3 = F_{3x}\mathbf{i} + F_{3y}\mathbf{j} - F_{3z}\mathbf{k}$. If the sum of all these forces must equal zero, find the required scalar equations to solve for the components of $\vec{F}_3$.

1.2.23 A force $\vec{F}$ is directed from point A(3,2,0) to point B(0,2,4). If the x-component of the force is 120 N, find the y- and z-components of $\vec{F}$.


1.2.24 A vector equation for the sum of forces results in the following equation:

$$\frac{F}{2}(\mathbf{i} - \sqrt{3}\mathbf{j}) + \frac{R}{5}(3\mathbf{i} + 6\mathbf{j}) = 25\text{ N}\hat{\lambda}$$

where $\hat{\lambda} = 0.30\mathbf{i} - 0.954\mathbf{j}$. Find two scalar equations by dotting both sides of the equation first with $\hat{\lambda}$ and then separately with a vector orthogonal to $\hat{\lambda}$.

1.2.25 Write a computer program (or use a canned program) to find the dot product of two 3-D vectors. Test the program by computing the dot products $\mathbf{i} \cdot \mathbf{i}$, $\mathbf{i} \cdot \mathbf{j}$, and $\mathbf{j} \cdot \mathbf{k}$. Now use the program to find the projections of $\vec{F} = (2\mathbf{i} + 2\mathbf{j} - 3\mathbf{k})\text{ N}$ along the line $\vec{r}_{AB} = (0.5\mathbf{i} - 0.2\mathbf{j} + 0.1\mathbf{k})\text{ m}$.

1.2.26 What is the shortest distance between the point A and the diagonal BC of the parallelepiped shown? (Use vector methods and don't use cross product.)



Problem 1.2.26

1.2.1 Find the dot product of $\vec{a} = 2\hat{i} + 3\hat{j} - \hat{k}$ and $\vec{b} = 2\hat{i} + \hat{j} + 2\hat{k}$.

$$\vec{a} = 2\hat{i} + 3\hat{j} - \hat{k}$$

$$\vec{b} = 2\hat{i} + \hat{j} + 2\hat{k}$$

$$\vec{a} \cdot \vec{b} = (2 \times 2) + (3 \times 1) + (-1 \times 2)$$

$$= 4 + 3 - 2$$

$$= 5$$

1.2.2 Find the dot product of $\vec{F} = 0.5\text{ N}\hat{i} + 1.2\text{ N}\hat{j} + 1.5\text{ N}\hat{k}$ and $\hat{\lambda} = -0.8\hat{i} + 0.6\hat{j}$.

$$\vec{F} = (0.5\text{ N})\hat{i} + (1.2\text{ N})\hat{j} + (1.5\text{ N})\hat{k}$$

$$\hat{\lambda} = (-0.8\hat{i} + 0.6\hat{j})$$

$$\vec{F} \cdot \hat{\lambda} = (0.5\text{ N})(-0.8\text{ m}) + (1.2\text{ N})(1\text{ m}) + (1.5\text{ N})(0\text{ m})$$

$$= -0.4\text{ Nm} + 1.2\text{ Nm}$$

$$= 0.8\text{ Nm}$$

1.2.3 Find the dot product $\vec{F} \cdot \vec{r}$ where $\vec{F} = (5\hat{i} + 4\hat{j})$ N and $\vec{r} = (-0.8\hat{i} + \hat{j})$ m. Draw the two vectors and justify your answer for the dot product.


$$\vec{F} = (5\hat{i} + 4\hat{j}) \text{ N}$$

$$\vec{r} = (-0.8\hat{i} + \hat{j}) \text{ m}$$

$$\vec{F} \cdot \vec{r} = (5 \text{ N} \times (-0.8 \text{ m})) + (4 \text{ N} \times 1 \text{ m})$$

$$= -4 \text{ Nm} + 4 \text{ Nm}$$

$$= 0 \text{ Nm}$$

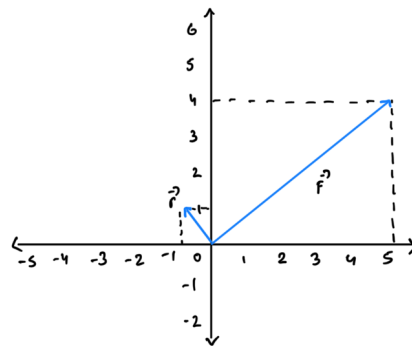

Since $\vec{F}$ and $\vec{r}$ are perpendicular to each other, the projection of one on the other would be at the point they intersect with the length of 0.

1.2.4 Two vectors, $\vec{a} = -4\sqrt{3}\hat{i} + 12\hat{j}$ and $\vec{b} = \hat{i} - \sqrt{3}\hat{j}$ are given. Find the dot product of the two vectors. How is $\vec{a} \cdot \vec{b}$ related to $|\vec{a}||\vec{b}|$ in this case?

$$\vec{a} = -4\sqrt{3}\hat{i} + 12\hat{j}$$

$$\vec{b} = \hat{i} - \sqrt{3}\hat{j}$$

Find dot product,

$$\begin{aligned}\vec{a} \cdot \vec{b} &= (-4\sqrt{3} \times 1) + (12 \times (-\sqrt{3})) \\ &= -16\sqrt{3}\end{aligned}$$

Find Product of Magnitudes,

$$\begin{aligned}|\vec{a}| &= \sqrt{(-4\sqrt{3})^2 + 12^2} \\ &= 8\sqrt{3}\end{aligned}$$

$$\begin{aligned}|\vec{b}| &= \sqrt{1^2 + (\sqrt{3})^2} \\ &= 2\end{aligned}$$

$$\begin{aligned}|\vec{a}||\vec{b}| &= 8\sqrt{3} \times 2 \\ &= 16\sqrt{3} = \vec{a} \cdot \vec{b}\end{aligned}$$

$$\text{Hence } \vec{a} \cdot \vec{b} = |\vec{a}||\vec{b}|$$

1.2.5 Find the dot product of two vectors

$$\vec{F} = 10 \text{ lbf} \hat{i} - 20 \text{ lbf} \hat{j} \text{ and } \hat{\lambda} = 0.8 \hat{i} + 0.6 \hat{j}.$$

Sketch $\vec{F}$ and $\hat{\lambda}$ and show what their dot product represents.


$$\vec{F} = (10 \text{ lbf}) \hat{i} - (20 \text{ lbf}) \hat{j}$$

$$\hat{\lambda} = 0.8 \hat{i} + 0.6 \hat{j}$$

$$\vec{F} \cdot \hat{\lambda} = (10 \text{ lbf} \times 0.8) + (-20 \text{ lbf} \times 0.6)$$

$$= 8 \text{ lbf} - 12 \text{ lbf}$$

$$= -4 \text{ lbf}$$

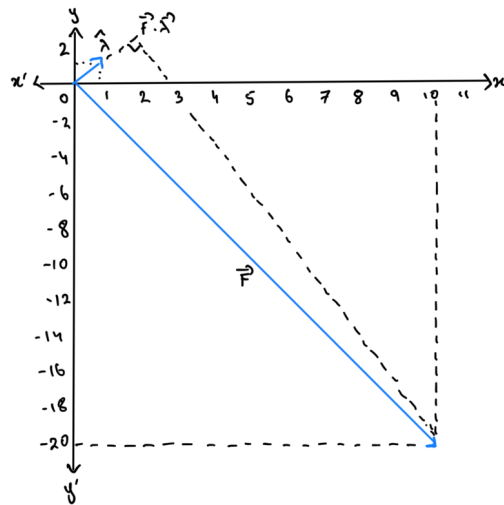

1.2.6 The position vector of a point A is $\vec{r}_A = 30 \text{ cm} \hat{i}$. Find the dot product of $\vec{r}_A$ with $\hat{\lambda} = \frac{\sqrt{3}}{2} \hat{i} + \frac{1}{2} \hat{j}$.


$$\vec{r}_A = (30 \text{ cm}) \hat{i}$$

$$\hat{\lambda} = \frac{\sqrt{3}}{2} \hat{i} + \frac{1}{2} \hat{j}$$

$$\vec{r}_A \cdot \hat{\lambda} = \left(30 \text{ cm} \times \frac{\sqrt{3}}{2} \right) + \left(0 \text{ cm} \times \frac{1}{2} \right)$$

$$= 15\sqrt{3} \text{ cm}$$

1.2.7 From the figure below, find the component of force $\vec{F}$ in the direction of $\hat{\lambda}$.

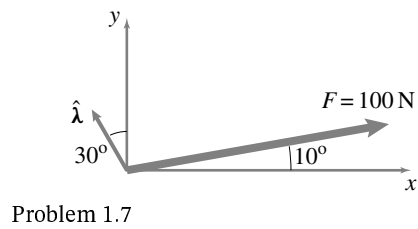

$$|\vec{F}| = 100 \text{ N}$$

$$|\hat{\lambda}| = 1$$

Find angle between $\vec{F}$ and $\hat{\lambda}$,

$$\begin{aligned}\theta_{F\lambda} &= (90 - 10) + 30 \\ &= 110^\circ\end{aligned}$$

$$\vec{F} \cdot \hat{\lambda} = |\vec{F}| |\hat{\lambda}| \cos \theta_{F\lambda}$$

$$= 100 \text{ N} \times 1 \times \cos 110^\circ$$

$$= -34.2 \text{ N}$$

1.2.8 Find the angle between $\vec{F}_1 = 2\text{ N}\hat{i} + 5\text{ N}\hat{j}$ and $\vec{F}_2 = -2\text{ N}\hat{i} + 6\text{ N}\hat{j}$.

$$\vec{F}_1 = 2\text{ N}\hat{i} + 5\text{ N}\hat{j}$$

$$\vec{F}_2 = -2\text{ N}\hat{i} + 6\text{ N}\hat{j}$$

Find Dot Product,

$$\vec{F}_1 \cdot \vec{F}_2 = (2\text{ N} \times (-2\text{ N})) + (5\text{ N} \times 6\text{ N})$$

$$= -4\text{ N}^2 + 30\text{ N}^2$$

$$= 26\text{ N}^2$$

Find magnitude of $\vec{F}_1$ and $\vec{F}_2$,

$$|\vec{F}_1| = \sqrt{(2\text{ N})^2 + (5\text{ N})^2}$$

$$= \sqrt{39}\text{ N}$$

$$|\vec{F}_2| = \sqrt{(-2\text{ N})^2 + (6\text{ N})^2}$$

$$= 2\sqrt{10}\text{ N}$$

$$\vec{F}_1 \cdot \vec{F}_2 = |\vec{F}_1| |\vec{F}_2| \cos \theta$$

$$\theta = \cos^{-1} \left(\frac{\vec{F}_1 \cdot \vec{F}_2}{|\vec{F}_1| |\vec{F}_2|} \right)$$

$$= \cos^{-1} \left[\frac{26}{2\sqrt{390}} \right]$$

$$= 48.83^\circ$$

1.2.9 Given $\vec{\omega} = 2 \text{ rad/s} \hat{i} + 3 \text{ rad/s} \hat{j}$, $\vec{H}_1 = (20\hat{i} + 30\hat{j}) \text{ kg m}^2/\text{s}$ and $\vec{H}_2 = (10\hat{i} + 15\hat{j} + 6\hat{k}) \text{ kg m}^2/\text{s}$, find (a) the angle between $\vec{\omega}$ and $\vec{H}_1$ and (b) the angle between $\vec{\omega}$ and $\vec{H}_2$.

$$\vec{\omega} = (2 \text{ rad/s}) \hat{i} + (3 \text{ rad/s}) \hat{j}$$

$$\vec{H}_1 = (20\hat{i} + 30\hat{j}) \text{ kg m}^2/\text{s}$$

$$\vec{H}_2 = (10\hat{i} + 15\hat{j} + 6\hat{k}) \text{ kg m}^2/\text{s}$$

$$1. \quad \vec{H}_1 \cdot \vec{\omega} = (20 \text{ kg m}^2/\text{s} \times 2 \text{ rad/s}) + (30 \text{ kg m}^2/\text{s} \times 3 \text{ rad/s})$$

$$= 40 \text{ kg m}^2 \text{ rad/s}^2 + 90 \text{ kg m}^2 \text{ rad/s}^2$$

$$= 130 \text{ kg m}^2 \text{ rad/s}^2$$

$$|\vec{H}_1| = \sqrt{(20 \text{ kg m}^2/\text{s})^2 + (30 \text{ kg m}^2/\text{s})^2}$$

$$= 10\sqrt{13} \text{ kg m}^2/\text{s}$$

$$|\vec{\omega}| = \sqrt{(2 \text{ rad/s})^2 + (3 \text{ rad/s})^2}$$

$$= \sqrt{13} \text{ rad/s}$$

Find angle between $\vec{H}_1$ and $\vec{\omega}$,

$$\theta = \cos^{-1} \left[\frac{\vec{H}_1 \cdot \vec{\omega}}{|\vec{H}_1| |\vec{\omega}|} \right]$$

$$= \cos^{-1} \left[\frac{130 \text{ kg m}^2 \text{ rad/s}^2}{10\sqrt{13} \text{ kg m}^2/\text{s} \times \sqrt{13} \text{ rad/s}} \right]$$

$$= 0^\circ$$

$$2. \quad \vec{H}_2 \cdot \vec{\omega} = (10 \text{ kg m}^2/\text{s} \times 2 \text{ rad/s}) + (15 \text{ kg m}^2/\text{s} \times 3 \text{ rad/s}) + (6 \text{ kg m}^2/\text{s} \times 0 \text{ rad/s})$$

$$= (20 + 45) \text{ kg m}^2 \text{ rad/s}^2$$

$$= 65 \text{ kg m}^2 \text{ rad/s}^2$$

$$|\vec{H}_2| = \sqrt{(10 \text{ kg m}^2/\text{s})^2 + (15 \text{ kg m}^2/\text{s})^2 + (6 \text{ kg m}^2/\text{s})^2}$$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

$$= 19 \text{ kg m}^2/\text{s}$$

Find angle between $\vec{H}_2$ and $\vec{\omega}$,

$$\theta = \cos^{-1} \left(\frac{\vec{H}_2 \cdot \vec{\omega}}{|\vec{H}_2| |\vec{\omega}|} \right)$$

$$= \cos^{-1} \left(\frac{65 \text{ kg m}^2 \text{ rad/s}^2}{19 \text{ kg m}^2/\text{s} \times \sqrt{13} \text{ rad/s}} \right)$$

$$= 18.4^\circ$$

1.2.10 The unit normal to a surface is given as $\hat{n} = 0.74\hat{i} + 0.67\hat{j}$. If the weight of a block on this surface acts in the $-\hat{j}$ direction, find the angle that a 1000 N normal force makes with the direction of weight of the block.

$$\hat{n} = 0.74\hat{i} + 0.67\hat{j}$$

$$\vec{F} = -1000\text{ N}\hat{j}$$

Find Dot Product and magnitudes,

$$\vec{F} \cdot \hat{n} = (-1000\text{ N} \times 0.74) + (0\text{ N} \times 0.67)$$

$$= -7400\text{ N}$$

$$|\vec{F}| = 1000\text{ N}$$

$$|\hat{n}| = 1$$

$$\theta = \cos^{-1} \left(\frac{\vec{F} \cdot \hat{n}}{|\vec{F}| |\hat{n}|} \right)$$

$$= \cos^{-1} \left(\frac{7400\text{ N}}{1000\text{ N} \times 1} \right)$$

$$= 42.27^\circ$$

1.2.11 Vector algebra. For each equation below state whether:

You may use trivial examples.

1. The equation is nonsense. If so, why?
 2. Is always true. Why? Give an example.
 3. Is never true. Why? Give an example.
 4. Is sometimes true. Give examples both ways.
- a) $\vec{A} + \vec{B} = \vec{B} + \vec{A}$
 - b) $\vec{A} + b = b + \vec{A}$
 - c) $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$
 - d) $\vec{B}/\vec{C} = B/C$
 - e) $b/\vec{A} = b/A$
 - f) $\vec{A} = (\vec{A} \cdot \vec{B})\vec{B} + (\vec{A} \cdot \vec{C})\vec{C} + (\vec{A} \cdot \vec{D})\vec{D}$

(a) 2. Vector addition is commutative.

$$\vec{A} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}, \quad \vec{B} = \begin{bmatrix} 3 \\ 2 \\ 1 \end{bmatrix}$$

$$\vec{A} + \vec{B} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} + \begin{bmatrix} 3 \\ 2 \\ 1 \end{bmatrix} = \begin{bmatrix} 4 \\ 4 \\ 4 \end{bmatrix}$$

$$\vec{B} + \vec{A} = \begin{bmatrix} 3 \\ 2 \\ 1 \end{bmatrix} + \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} = \begin{bmatrix} 4 \\ 4 \\ 4 \end{bmatrix}$$

Hence, $\vec{A} + \vec{B} = \vec{B} + \vec{A}$

(b) 2. A scalar can't be added to a vector, hence the equation still holds.

$$\vec{A} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}, \quad b = 4$$

$$\vec{A} + b = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} + 4$$

$$b + \vec{A} = 4 + \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}$$

Hence, $\vec{A} + b = b + \vec{A}$

(c) 2. Dot products are commutative, hence the equation holds true.

$$\vec{A} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}, \quad \vec{B} = \begin{bmatrix} 3 \\ 2 \\ 1 \end{bmatrix}$$

$$\vec{A} \cdot \vec{B} = (1 \times 3) + (2 \times 2) + (3 \times 1)$$

$$= 10$$

$$\vec{B} \cdot \vec{A} = (3 \times 1) + (2 \times 2) + (1 \times 3)$$

$$= 10$$

Hence, $\vec{A} \cdot \vec{B} = \vec{B} \cdot \vec{A}$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

(d) 1. There is no such thing as vector division, it holds no geometric interpretation.

(e) 1. It is not possible to divide a scalar by a vector.

(f) 4. It is true iff $\vec{B}, \vec{C}, \vec{D}$ are orthonormal vectors.

$$\vec{A} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}, \quad \vec{B} = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}, \quad \vec{C} = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}, \quad \vec{D} = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

$$\vec{A} = [(1 \times 1) + (2 \times 0) + (3 \times 0)] \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} + [(1 \times 0) + (2 \times 1) + (3 \times 0)] \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix} + [(1 \times 0) + (2 \times 0) + (3 \times 1)] \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$


$$= \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} + \begin{bmatrix} 0 \\ 2 \\ 0 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 3 \end{bmatrix}$$

$$= \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} = \vec{A}$$

1.2.12 Use the dot product to show 'the law of cosines'; i. e.,

$$c^2 = a^2 + b^2 + 2ab \cos \theta.$$

(Hint: $\vec{c} = \vec{a} + \vec{b}$; also, $\vec{c} \cdot \vec{c} = \vec{c} \cdot \vec{c}$)

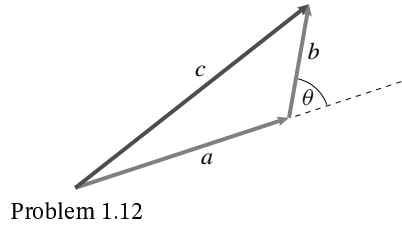

To Prove: $c^2 = a^2 + b^2 + 2ab \cos \theta$

$$\vec{c} = \vec{a} + \vec{b}$$

Write c^2 as $\vec{c} \cdot \vec{c}$

$$c^2 = (\vec{a} + \vec{b}) \cdot (\vec{a} + \vec{b})$$

$$= a^2 + b^2 + 2\vec{a} \cdot \vec{b}$$

$$= a^2 + b^2 + 2 \times |\vec{a}| |\vec{b}| \cos \theta$$

$$= a^2 + b^2 + 2ab \cos \theta$$

$$= \text{RHS}$$

Hence, Proved.

1.2.13 Find the direction cosines of $\vec{F} = 3\text{ N}\hat{i} - 4\text{ N}\hat{j} + 5\text{ N}\hat{k}$.

$$\vec{F} = (3\hat{i} - 4\hat{j} + 5\hat{k})\text{ N}$$

$$|\vec{F}| = \sqrt{(3\text{ N})^2 + (-4\text{ N})^2 + (5\text{ N})^2}$$

$$= 5\sqrt{2}$$

$$\hat{\lambda} = \frac{3}{5\sqrt{2}} \hat{i} - \frac{4}{5\sqrt{2}} \hat{j} + \frac{5}{5\sqrt{2}} \hat{k}$$

Find angle with x -axis,

$$\theta = \cos^{-1} \left[\frac{\hat{i} \cdot \hat{\lambda}}{|\hat{i}| |\hat{\lambda}|} \right]$$

$$= \cos^{-1} \left(\frac{3}{5\sqrt{2}} \right)$$

$$= 64.89^\circ$$

Find angle with y -axis,

$$\phi = \cos^{-1} \left[\frac{\hat{j} \cdot \hat{\lambda}}{|\hat{j}| |\hat{\lambda}|} \right]$$

$$= \cos^{-1} \left(\frac{4}{5\sqrt{2}} \right)$$

$$= 55.55^\circ$$

Find angle with z -axis,

$$\psi = \cos^{-1} \left[\frac{\hat{k} \cdot \hat{\lambda}}{|\hat{k}| |\hat{\lambda}|} \right]$$

$$= \cos^{-1} \left[\frac{1}{\sqrt{2}} \right]$$

$$= 45^\circ$$

1.2.14 A force acting on a bead of mass m is given as $\vec{F} = -20 \text{ lbf } \hat{i} + 22 \text{ lbf } \hat{j} + 12 \text{ lbf } \hat{k}$. What is the angle between the force and the z -axis?

$$\vec{F} = (-20\hat{i} + 22\hat{j} + 12\hat{k}) \text{ lbf}$$

$$|\vec{F}| = \sqrt{(-20 \text{ lbf})^2 + (22 \text{ lbf})^2 + (12 \text{ lbf})^2}$$

$$= 2\sqrt{257} \text{ lbf}$$

Find angle with z -axis,


$$\gamma = \cos^{-1} \left(\frac{\hat{k} \cdot \vec{F}}{|\hat{k}| |\vec{F}|} \right)$$

$$= \cos^{-1} \left(\frac{12 \text{ lbf}}{2\sqrt{257} \text{ lbf}} \right)$$

$$= 68.02^\circ$$

1.2.15 (a) Draw the vector $\vec{r} = 3.5 \hat{i} + 3.5 \hat{j} - 4.95 \hat{k}$. (b) Find the angle this vector makes with the z-axis. (c) Find the angle this vector makes with the x-y plane.

$$(a) \vec{r} = 3.5 \text{ in } \hat{i} + 3.5 \text{ in } \hat{j} - 4.95 \text{ in } \hat{k}$$

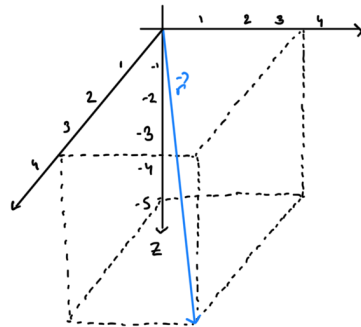

$$(b) \gamma = \cos^{-1} \left[\frac{\hat{k} \cdot \vec{r}}{|\hat{k}| |\vec{r}|} \right]$$

$$\hat{k} \cdot \vec{r} = -4.95 \text{ in}$$

$$|\hat{k}| = 1$$

$$|\vec{r}| = \sqrt{(3.5 \text{ in})^2 + (3.5 \text{ in})^2 + (-4.95 \text{ in})^2}$$

$$= 7 \text{ in}$$

Find angle with z-axis,

$$\gamma = \cos^{-1} \left[\frac{-4.95 \text{ in}}{1 \times 7 \text{ in}} \right]$$

$$= 135^\circ$$

(c) Let the x-y plane be denoted by $\hat{\lambda} = \frac{1}{\sqrt{2}} \hat{i} + \frac{1}{\sqrt{2}} \hat{j}$

$$\begin{aligned} \hat{\lambda} \cdot \vec{r} &= \frac{3.5}{\sqrt{2}} + \frac{3.5}{\sqrt{2}} \\ &= \frac{7}{\sqrt{2}} \end{aligned}$$


$$|\hat{\lambda}| = 1$$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

$$\begin{aligned}
 \theta &= \cos^{-1} \left[\frac{\hat{\lambda} \cdot \hat{r}}{|\hat{\lambda}| |\hat{r}|} \right] \\
 &= \cos^{-1} \left[\frac{\frac{1}{\sqrt{2}} \times \frac{1}{1}}{1} \right] \\
 &= 45^\circ
 \end{aligned}$$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

1.2.16 In the figure shown, $\hat{\lambda}$ and $\hat{n}$ are unit vectors parallel and perpendicular to the surface AB, respectively. A force $\vec{W} = -50 \text{ N} \hat{j}$ acts on the block. Find the components of $\vec{W}$ along $\hat{\lambda}$ and $\hat{n}$.

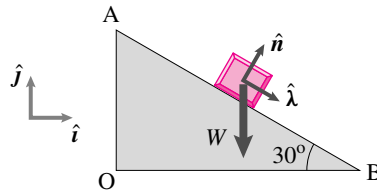

Problem 1.16

Find unit vector in the direction of $\vec{\lambda}$,

$$\begin{aligned}\vec{\lambda} &= \cos 330^\circ \hat{i} + \sin 330^\circ \hat{j} \\ &= \frac{\sqrt{3}}{2} \hat{i} - \frac{1}{2} \hat{j}\end{aligned}$$

$$|\vec{\lambda}| = 1$$

$$\hat{\lambda} = \frac{\vec{\lambda}}{|\vec{\lambda}|}$$

$$= \frac{\sqrt{3}}{2} \hat{i} - \frac{1}{2} \hat{j}$$

$$\vec{W} = -50 \text{ N} \hat{j}$$

$$\begin{aligned}\text{Component of } \vec{W} \text{ along } \hat{\lambda} : \vec{W} \cdot \hat{\lambda} &= \left(0 \text{ N} \times \frac{\sqrt{3}}{2} \right) + \left(-50 \text{ N} \times -\frac{1}{2} \right) \\ &= 25 \text{ N}\end{aligned}$$

$$\hat{n} = \cos 60^\circ \hat{i} + \sin 60^\circ \hat{j}$$


$$= \frac{1}{2} \hat{i} + \frac{\sqrt{3}}{2} \hat{j}$$

$$\text{Component of } \vec{W} \text{ along } \hat{n} : \vec{W} \cdot \hat{n}$$

$$= \left(0 \text{ N} \times \frac{1}{2} \right) + \left(-50 \text{ N} \times \frac{\sqrt{3}}{2} \right)$$

$$= -25\sqrt{3} \text{ N}$$

1.2.17 Express the unit vectors $\hat{n}$ and $\hat{\lambda}$ in terms of $\hat{i}$ and $\hat{j}$ shown in the figure. What are the x and y components of $\vec{r} = 3.0\text{ft}\hat{n} - 1.5\text{ft}\hat{\lambda}$?

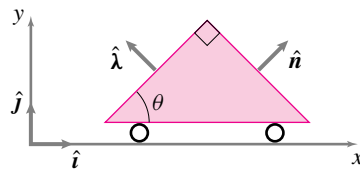


Problem 1.17

Answer:


$$r_x = \vec{r} \cdot \hat{i} = (3 \cos \theta + 1.5 \sin \theta) \text{ ft}, \quad r_y = \vec{r} \cdot \hat{j} = (3 \sin \theta - 1.5 \cos \theta) \text{ ft}.$$

Page 6

1.54 Express the unit vectors $\hat{n}$ and $\hat{\lambda}$ in terms of $\hat{i}$ and $\hat{j}$ shown in the figure. What are the x and y components of $\vec{r} = 3.0\text{ft}\hat{n} - 1.5\text{ft}\hat{\lambda}$?



probfig 1.54:



$$\hat{\lambda} = -\sin \theta \hat{i} + \cos \theta \hat{j}$$

$$\hat{n} = \cos \theta \hat{i} + \sin \theta \hat{j}$$

notice $\hat{\lambda} \perp \hat{n}$

$$\begin{aligned} \vec{r} &= 3\text{ft} \hat{n} - 1.5\text{ft} \hat{\lambda} \\ &= (3\cos \theta + 1.5\sin \theta) \text{ft} \hat{i} + (3\sin \theta - 1.5\cos \theta) \text{ft} \hat{j} \end{aligned}$$

$$x\text{-component} = (3\cos \theta + 1.5\sin \theta) \text{ft}$$

$$y\text{-component} = (3\sin \theta - 1.5\cos \theta) \text{ft}$$

$$\vec{r} = 3.0 ft \hat{n} - 1.5 ft \hat{\lambda}$$

$$\hat{n} = \cos \theta \hat{i} + \sin \theta \hat{j}$$


$$\begin{aligned} \hat{\lambda} &= \cos(\theta + 90^\circ) \hat{i} + \sin(\theta + 90^\circ) \hat{j} \\ &= -\cos \theta \hat{i} + \sin \theta \hat{j} \end{aligned}$$

$$\vec{r} = 3.0 ft (\cos \theta \hat{i} + \sin \theta \hat{j}) - 1.5 ft (-\cos \theta \hat{i} + \sin \theta \hat{j})$$

$$= (4.5 \cos \theta \hat{i} + 1.5 \sin \theta \hat{j}) ft$$

1.2.18 Find the projection of vector $\vec{r}_{AB}$ (you have to first find this position vector)

1. on the y-axis, and
2. in the $\hat{\lambda}$ direction.



Problem 1.18

$$\vec{r}_A = (3\text{m})\hat{i} + (2\text{m})\hat{k}$$

$$\vec{r}_B = (-1\text{m})\hat{i} + (2\text{m})\hat{j}$$

$$\vec{r}_{AB} = \vec{r}_B - \vec{r}_A$$

$$= (-4\text{m})\hat{i} + (2\text{m})\hat{j} - (2\text{m})\hat{k}$$

1. Find Dot Product,

$$\vec{r}_{AB} \cdot \hat{j} = (-4\text{m} \times 0) + (2\text{m} \times 1) + (-2\text{m} \times 0)$$

$$= 2\text{m}$$

$$2. \quad \hat{\lambda} = \sin 30^\circ \hat{i} + \cos 30^\circ \hat{j}$$

$$= \frac{1}{2} \hat{i} + \frac{\sqrt{3}}{2} \hat{j}$$

Find Dot Product,

$$\vec{r}_{AB} \cdot \hat{\lambda} = \left(-4\text{m} \times \frac{1}{2} \right) + \left(2\text{m} \times \frac{\sqrt{3}}{2} \right) + (-2\text{m} \times 0)$$

$$= (-2 + \sqrt{3})\text{m}$$

1.2.19 The net force acting on a particle is $\vec{F} = 2\text{ N}\hat{i} + 10\text{ N}\hat{j}$. Find the components of this force in another coordinate system with basis vectors $\hat{i}' = -\cos\theta\hat{i} + \sin\theta\hat{j}$ and $\hat{j}' = -\sin\theta\hat{i} - \cos\theta\hat{j}$. For $\theta = 30^\circ$, sketch the vector $\vec{F}$ and show its components in the two coordinate systems.

$$\vec{F} = 2\text{ N}\hat{i} + 10\text{ N}\hat{j}$$

$$\hat{i}' = -\cos\theta\hat{i} + \sin\theta\hat{j}$$

$$\hat{j}' = -\sin\theta\hat{i} - \cos\theta\hat{j}$$

Find $\hat{i}$ in terms of $\hat{i}'$ and $\hat{j}'$.

$$\cos\theta\hat{i}' = -\cos^2\theta\hat{i} + \sin\theta\cos\theta\hat{j} \quad \text{--- (i)}$$

$$\sin\theta\hat{j}' = -\sin^2\theta\hat{i} - \sin\theta\cos\theta\hat{j} \quad \text{--- (ii)}$$

$$(i) + (ii)$$

$$\cos\theta\hat{i}' + \sin\theta\hat{j}' = (-\cos^2\theta + \sin^2\theta)\hat{i}$$

$$\hat{i} = -(\cos\theta\hat{i}' + \sin\theta\hat{j}')$$

$$\sin\theta\hat{i}' = -\cos\theta\sin\theta\hat{i} + \sin^2\theta\hat{j} \quad \text{--- (iii)}$$

$$\cos\theta\hat{j}' = -\cos\theta\sin\theta\hat{i} - \cos^2\theta\hat{j} \quad \text{--- (iv)}$$

$$(iii) - (iv)$$

$$\sin\theta\hat{i}' - \cos\theta\hat{j}' = (\sin^2\theta + \cos^2\theta)\hat{j}$$

$$\hat{j} = \sin\theta\hat{i}' - \cos\theta\hat{j}'$$

Plug in $\hat{i}$ and $\hat{j}$ into $\vec{F}$,

$$\vec{F} = 2\text{ N}(\cos\theta\hat{i}' + \sin\theta\hat{j}') + 10\text{ N}(\sin\theta\hat{i}' - \cos\theta\hat{j}')$$


$$= (2\text{ N}\cos\theta + 10\text{ N}\sin\theta)\hat{i}' + (2\text{ N}\sin\theta - 10\text{ N}\cos\theta)\hat{j}'$$

$$\theta = 30^\circ$$


$$\vec{F} = (5\text{ N} - 5\sqrt{3}\text{ N})\hat{i}' - (5\sqrt{3}\text{ N} + 1\text{ N})\hat{j}'$$

$$= (3.26\text{ N})\hat{i}' - (4.66\text{ N})\hat{j}'$$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

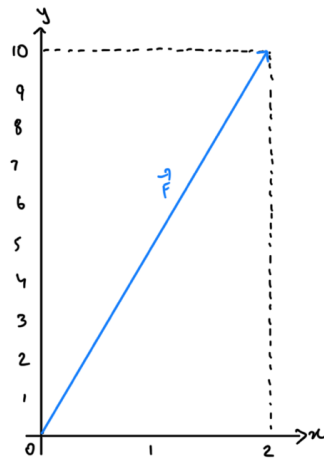


in terms
of $\hat{i}$ and $\hat{j}$

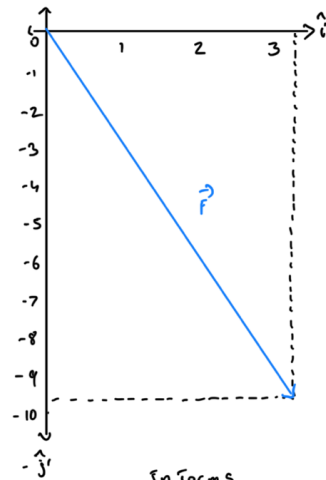

in terms
of $\hat{i}'$ and $\hat{j}'$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

1.2.20 Find the unit vectors $\hat{e}_R$ and $\hat{e}_\theta$ in terms of $\hat{i}$ and $\hat{j}$ with the geometry shown in the figure. What are the components of $\vec{W}$ along $\hat{e}_R$ and $\hat{e}_\theta$?



Problem 1.20

2.2.20

From the figure unit vectors $\hat{e}_\theta$ and $\hat{e}_R$ can be written in terms of $\hat{i}$ & $\hat{j}$.

$$\hat{e}_\theta = \cos\theta \hat{i} + \sin\theta \hat{j}$$

$$\hat{e}_R = \sin\theta \hat{i} - \cos\theta \hat{j}$$

component of W along $\hat{e}_R = W \cos\theta$

" " $\hat{e}_\theta = -W \sin\theta$

Thus W can be written as

$$W = (W \cos\theta) \hat{e}_R - (W \sin\theta) \hat{e}_\theta$$

$$\vec{e}_R = \cos(270^\circ + \theta) \hat{i} + \sin(270^\circ + \theta) \hat{j}$$

$$= \cos \theta \hat{i} - \sin \theta \hat{j}$$

$$\vec{e}_\theta = \cos \theta \hat{i} + \sin \theta \hat{j}$$

$$\vec{\omega} = -|\vec{\omega}| \hat{j}$$

Find Dot Product,

$$\vec{\omega} \cdot \vec{e}_R = (0 \times \cos \theta) + (-|\vec{\omega}| \times (-\sin \theta))$$


$$= |\vec{\omega}| \sin \theta$$

$$\vec{\omega} \cdot \vec{e}_\theta = (0 \times \cos \theta) + (-|\vec{\omega}| \times \sin \theta)$$

$$= -|\vec{\omega}| \sin \theta$$

1.2.21 Write the position vector of point P in terms of $\hat{\lambda}_1$ and $\hat{\lambda}_2$ and

1. find the y-component of $\vec{r}_P$,
2. find the component of $\vec{r}_P$ along $\hat{\lambda}_1$.

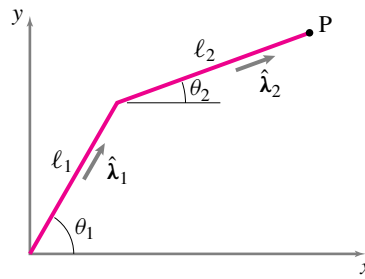

Problem 1.21

$$\vec{r}_P = l_1 \hat{\lambda}_1 + l_2 \hat{\lambda}_2$$

$$\hat{\lambda}_1 = \cos \theta_1 \hat{i} + \sin \theta_1 \hat{j}$$

$$\hat{\lambda}_2 = \cos \theta_2 \hat{i} + \sin \theta_2 \hat{j}$$

$$\vec{r}_P = (l_1 \cos \theta_1 + l_2 \cos \theta_2) \hat{i} + (l_1 \sin \theta_1 + l_2 \sin \theta_2) \hat{j}$$

$$1. \quad \vec{r}_P \cdot \hat{j} = (l_1 \sin \theta_1 + l_2 \sin \theta_2)$$

$$\begin{aligned} 2. \quad \vec{r}_P \cdot \hat{\lambda}_1 &= (l_1 \cos \theta_1 + l_2 \cos \theta_2) l_1 \cos \theta_1 + (l_1 \sin \theta_1 + l_2 \sin \theta_2) l_1 \sin \theta_1 \\ &= l_1 (l_1 \cos^2 \theta_1 + l_1 \sin^2 \theta_1) + l_1 l_2 (\cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2) \\ &= l_1 + l_1 l_2 (\cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2) \end{aligned}$$

1.2.22

Let $\vec{F}_1 = 30\text{ N}\hat{i} + 40\text{ N}\hat{j} - 10\text{ N}\hat{k}$, $\vec{F}_2 = -20\text{ N}\hat{j} + 2\text{ N}\hat{k}$, and $\vec{F}_3 = F_{3x}\hat{i} + F_{3y}\hat{j} - F_{3z}\hat{k}$. If the sum of all these forces must equal zero, find the required scalar equations to solve for the components of $\vec{F}_3$.

2.2.22

$$\vec{F}_1 = 30\text{ N}\hat{i} + 40\text{ N}\hat{j} - 10\text{ N}\hat{k}$$

$$\vec{F}_2 = -20\text{ N}\hat{j} + 2\text{ N}\hat{k}$$

$$\vec{F}_3 = F_{3x}\hat{i} + F_{3y}\hat{j} - F_{3z}\hat{k}$$

Sum of all 3 forces are zero

$$\vec{F}_1 + \vec{F}_2 + \vec{F}_3 = \vec{0}$$

$$\Rightarrow (30\text{ N} + F_{3x})\hat{i} + (40\text{ N} - 20\text{ N} + F_{3y})\hat{j} + (-10\text{ N} + 2\text{ N} - F_{3z})\hat{k}$$

For above to be true each component must be equal to zero,

$$\begin{aligned} 30\text{ N} + F_{3x} &= 0 \Rightarrow F_{3x} = -30\text{ N} \\ 40\text{ N} - 20\text{ N} + F_{3y} &= 0 \Rightarrow F_{3y} = -20\text{ N} \\ -10\text{ N} + 2\text{ N} - F_{3z} &= 0 \Rightarrow F_{3z} = -8\text{ N} \end{aligned}$$

Thus

$$\vec{F}_3 = -30\text{ N}\hat{i} - 20\text{ N}\hat{j} + 8\text{ N}\hat{k}$$

$$\vec{F}_1 = 30\text{ N}\hat{i} + 40\text{ N}\hat{j} - 10\text{ N}\hat{k}$$

$$\vec{F}_2 = -20\hat{j} + 2\text{ N}\hat{k}$$

$$\vec{F}_3 = F_{3x}\hat{i} + F_{3y}\hat{j} + F_{3z}\hat{k}$$

Add Vectors and Equate to $\vec{0}$

$$\vec{F}_1 + \vec{F}_2 + \vec{F}_3 = \vec{0}$$

$$30\text{ N}\hat{i} + 40\text{ N}\hat{j} - 10\text{ N}\hat{k} - 20\text{ N}\hat{j} + 2\text{ N}\hat{k} + \vec{F}_3 = \vec{0}$$

$$\vec{F}_3 = -30\text{ N}\hat{i} - 20\text{ N}\hat{j} + 8\text{ N}\hat{k}$$

$$\Rightarrow F_{3x} = -30\text{ N}, F_{3y} = -20\text{ N}, F_{3z} = 8\text{ N}$$

1.2.23 A force $\vec{F}$ is directed from point A(3,2,0) to point B(0,2,4). If the x-component of the force is 120 N, find the y- and z-components of $\vec{F}$.

$$\vec{r}_A = 3\hat{i} + 2\hat{j}$$

$$\vec{r}_B = 2\hat{j} + 4\hat{k}$$

Subtract Position Vector of A from B,

$$\vec{r}_{AB} = \vec{r}_B - \vec{r}_A$$

$$= -3\hat{i} + 4\hat{k}$$

$$\vec{F} = \vec{r}_{AB} \times \frac{40}{\sqrt{3}} \text{ N}$$

$$= -40 \text{ N} \times \vec{r}_{AB}$$

$$= 120 \text{ N} \hat{i} - 160 \text{ N} \hat{k}$$

$$F_y = 0, F_z = -160 \text{ N}$$

1.2.24 A vector equation for the sum of forces results in the following equation:

$$\frac{F}{2}(\hat{i} - \sqrt{3}\hat{j}) + \frac{R}{5}(3\hat{i} + 6\hat{j}) = 25\text{ N}\hat{\lambda}$$

where $\hat{\lambda} = 0.30\hat{i} - 0.954\hat{j}$. Find two scalar equations by dotting both sides of the equation first with $\hat{\lambda}$ and then separately with a vector orthogonal to $\hat{\lambda}$.

$$\frac{F}{2}(\hat{i} - \sqrt{3}\hat{j}) + \frac{R}{5}(3\hat{i} + 6\hat{j}) = 25\text{ N}\hat{\lambda}$$

$$\left(\frac{F}{2} + \frac{3R}{5}\right)\hat{i} + \left(-\frac{F\sqrt{3}}{2} + \frac{6R}{5}\right)\hat{j} = 25\text{ N}\hat{\lambda}$$

$$\hat{\lambda} = 0.3\hat{i} - 0.954\hat{j}$$

Dot both sides by $\hat{\lambda}$,

$$\frac{3}{10}\left(\frac{F}{2} + \frac{3R}{5}\right) + (-0.954)\left(-\frac{F\sqrt{3}}{2} + \frac{6R}{5}\right) = 25(0.3^2 + (-0.954)^2)$$

$$\frac{F}{2}\left(\frac{3}{10} + (0.954 \times \sqrt{3})\right) + \frac{3R}{5}\left(\frac{3}{10} + (2 \times (-0.954))\right) = 25$$

$$\hat{\lambda} \cdot \hat{\lambda} = 0 \quad [\text{Perpendicular}]$$

$$\text{Let } \hat{\lambda} \text{ be } x\hat{i} + y\hat{j}$$

$$0.3x - 0.954y = 0$$

$$x = \frac{0.954}{0.3}y$$

$$1 = \sqrt{x^2 + y^2}$$

$$1 = \left(\left(\frac{0.954}{0.3}\right)^2 + 1\right)y^2$$

$$y = \left(\left(\frac{0.954}{0.3}\right)^2 + 1\right)^{-1/2}$$

$$= 0.299 \sim 0.3$$

$$x = 0.954$$

$$\hat{\lambda} = 0.954\hat{i} + 0.3\hat{j}$$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.

$$\left(\frac{F}{2} + \frac{3R}{5}\right)\hat{i} + \left(-\frac{F\sqrt{3}}{2} + \frac{6R}{5}\right)\hat{j} = 0 \text{ N } \hat{\lambda}'$$

Dot with $\hat{\lambda}'$,

$$0.954 \left(\frac{F}{2} + \frac{3R}{5}\right) + \frac{3}{10} \left(-\frac{F\sqrt{3}}{2} + \frac{6R}{5}\right) = 0$$

$$\frac{F}{2} \left(0.954 - \frac{3\sqrt{3}}{10}\right) + \frac{3R}{5} \left(0.954 + \frac{3}{25}\right) = 0$$

1.2.25 Write a computer program (or use a canned program) to find the dot product of two 3-D vectors. Test the program by computing the dot products $\hat{i} \cdot \hat{i}$, $\hat{i} \cdot \hat{j}$, and $\hat{j} \cdot \hat{k}$. Now use the program to find the projections of $\vec{F} = (2\hat{i} + 2\hat{j} - 3\hat{k})\text{N}$ along the line $\vec{r}_{AB} = (0.5\hat{i} - 0.2\hat{j} + 0.1\hat{k})\text{m}$.

Code:

```
i = [1;0;0];
j = [0;1;0];
k = [0;0;1];

% Testing Program %
disp("Start Function Test")
dot(i,i)
dot(i,j)
dot(j,k)
disp("Function Test Completed")


% Main Question %
F = [2;2;-3];
rAB = [0.5;-0.2;0.1];
disp(" ");
disp("Answer: ")
dot(F,rAB)

function scalar = dot(v1,v2)
    scalar = 0;
    for i = 1:3
        scalar = scalar + (v1(i)*v2(i));
    end
end
```

Output of Code

```
Start Function Test
1
0
0
Function Test Completed
Answer : 0.3
```

1.2.26 What is the shortest distance between the point A and the diagonal BC of the parallelepiped shown? (Use vector methods and don't use cross product.)



Problem 1.26

$$\vec{r}_A = 0\hat{i} + 0\hat{j} + 0\hat{k}$$

$$\vec{r}_B = 3\hat{j} - \hat{k}$$

$$\vec{r}_C = 4\hat{i}$$

$$\vec{r}_{BC} = \vec{r}_B - \vec{r}_C$$

$$= 4\hat{i} - 3\hat{j} + \hat{k}$$

Coordinates for any: $1z = -3y = 4x = \lambda$

point on BC

$$\Rightarrow x = 1/4 \lambda, y = -1/3 \lambda, z = \lambda$$

Vector from A to any point on BC: $(1/4 \lambda - 0)\hat{i} + (-1/3 \lambda - 0)\hat{j} + (\lambda - 0)\hat{k}$

$$\vec{r}_{BC} \cdot \vec{r}_{BCA} = 0$$

$$(4 \times 1/4 \lambda) + (-3 \times -1/3 \lambda) + (1 \times \lambda) = 0$$

$$3\lambda = 0$$

$$\lambda = 1/3$$

Point on BC closest to A: $3/4 \hat{i} - \hat{j} + 1/3 \hat{k}$

$$\text{Shortest Distance} = \sqrt{(3/4)^2 + (1)^2 + (1/3)^2}$$

$$= \frac{\sqrt{241}}{12}$$

Disclaimer: We have lost track of the many people who wrote these solutions. They are not official and have not been reviewed by the authors for correctness.